



G1

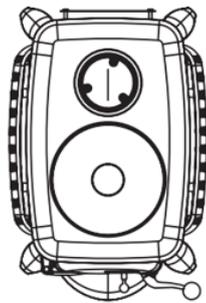


H150
595

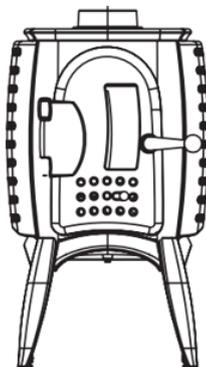

565

Ø120

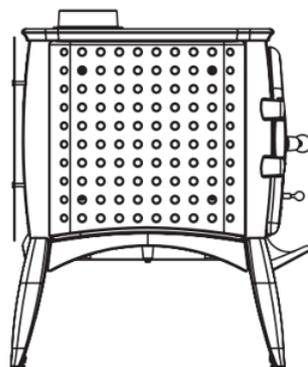

677



Dimensions and weight

Height [mm]	677
Width [mm]	400
Depth [mm]	595
Combustion chamber width [mm]	220
Combustion chamber height [mm]	300
Combustion chamber depth [mm]	400
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1237
Dimensions, b (with Austroflamm elbow piece) [mm]	565
Dimensions, c (with Austroflamm elbow piece) [mm]	822
Dimensions, d (with Austroflamm elbow piece) [mm]	154
Flue pipe outlet, diameter [mm]	120
Outside air connection diameter [Ø mm]	-
Weight, basic appliance [kg]	85
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	85
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
a: Safety distance to combustible materials, front [mm]	800
b: Safety distance to combustible materials, left [mm]	700
c: Safety distance to combustible materials, rear [mm]	400
d: Safety distance to combustible materials, right [mm]	700
Safety distance to combustible materials, floor [mm]	0

Output

Nominal heat efficiency [kW]	6.0
Minimum heat output [kW]	3.0
Maximum heat output [kW]	8.0
Minimum room heating capacity [m ³]	65
Maximum room heating capacity [m ³]	165
Energy efficiency class	A

Data for the chimney sweep

Exhaust gas mass flow [g/s]	5.2
Flue gas temperature [°C]	330
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10

Equipment

Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	No
Ash removal	Flat bed firing

- not available