

EN 13229

BlmSchV Stufe 2

Regensburger BStV / Aachener BStV / Munchener BStV

LRV


4 stelle DM.186



(Max) nominal heat output	14.8 kW
Minimum heat output	6.8 kW
Efficiency at Max	80.8 %
Efficiency at Min	78.9 %
Energy Efficiency Class (A++ / G scale)	A+
Energy Efficiency Index (EEI)	107 %
Seasonal space heating energy efficiency ( $\eta_s$ )	71 %
Temperature of exhaust smoke at Max	258 °C
Temperature of exhaust smoke at Min	227 °C
Particulate/OGC / Nox (nominal at 13%O <sub>2</sub> )	19 - 52 - 104 mg/Nm <sup>3</sup>
CO at 13% O <sub>2</sub> at Min and at Max	0.125 - 0.09 %
CO <sub>2</sub> at Min and at Max	7.3 - 9.5 %
Recommended draught at Max power	12 Pa
Minimum draught allowed for minimum power	10 Pa
Mass of smoke at Min and at Max	7.7 - 12.5 g/sec
Fuel dimensions	L 250 ÷ 330mm
Hourly consumption at Min and at Max	2 - 4.2 kg/h *
Heatable volume m <sup>3</sup>	269 - 423 - 740 **
Combustion air inlet	Ø 150 mm
Air inlet	180 cm <sup>2</sup>
Smoke outlet	Ø 200 mm
Net weight	344 kg
Distance from combustible material (back/side/under)	160 mm / 160 mm / 220 mm
Distance from combustible material (front/ceiling)	800 mm / 1400 mm

\* Data that may vary depending on the type of pellets used.

 \*\*Heatable volume based on the requested power per m<sup>3</sup> (respectively 55-35-20 W/m<sup>3</sup>)

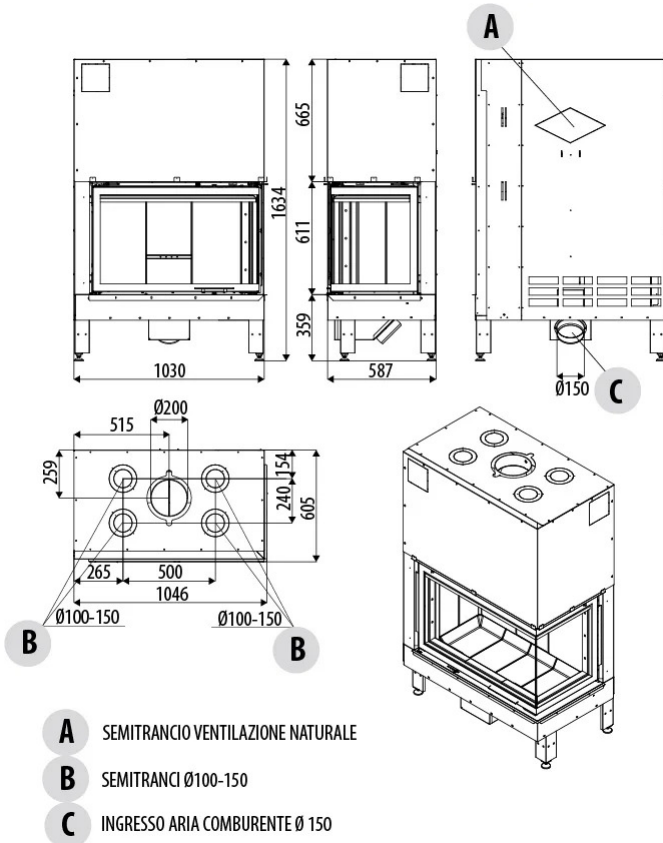

**A** SEMITRANCIO VENTILAZIONE NATURALE

**B** SEMITRANCI Ø100-150

**C** INGRESSO ARIA COMBURENTE Ø 150



EN 13229

BlmSchV Stufe 2

Regensburger BStV / Aachener BStV / Munchener BStV

LRV

4 stelle DM.186



flamme  
VERTE

<b>(Max) nominal heat output</b>	<b>14.8 kW</b>
<b>Minimum heat output</b>	<b>6.8 kW</b>
<b>Efficiency at Max</b>	<b>80.8 %</b>
<b>Efficiency at Min</b>	<b>78.9 %</b>
<b>Energy Efficiency Class (A++ / G scale)</b>	<b>A+</b>
<b>Energy Efficiency Index (EEI)</b>	<b>107 %</b>
<b>Seasonal space heating energy efficiency (ηs)</b>	<b>71 %</b>
<b>Temperature of exhaust smoke at Max</b>	<b>258 °C</b>
<b>Temperature of exhaust smoke at Min</b>	<b>227 °C</b>
<b>Particulate/OGC / Nox (nominal at 13%O2)</b>	<b>19 - 52 - 104 mg/Nm3</b>
<b>CO at 13% O<sub>2</sub> at Min and at Max</b>	<b>0.125 - 0.09 %</b>
<b>CO<sub>2</sub> at Min and at Max</b>	<b>7.3 - 9.5 %</b>
<b>Recommended draught at Max power</b>	<b>12 Pa</b>
<b>Minimum draught allowed for minimum power</b>	<b>10 Pa</b>
<b>Mass of smoke at Min and at Max</b>	<b>7.7 - 12.5 g/sec</b>
<b>Fuel dimensions</b>	<b>L 250 ÷ 330mm</b>
<b>Hourly consumption at Min and at Max</b>	<b>2 - 4.2 kg/h *</b>
<b>Heatable volume m3</b>	<b>269 - 423 - 740 **</b>
<b>Combustion air inlet</b>	<b>Ø 150 mm</b>
<b>Air inlet</b>	<b>180 cm<sup>2</sup></b>
<b>Smoke outlet</b>	<b>Ø 200 mm</b>
<b>Net weight</b>	<b>344 kg</b>
<b>Distance from combustible material (back/side/under)</b>	<b>160 mm / 160 mm / 220 mm</b>
<b>Distance from combustible material (front/ceiling)</b>	<b>800 mm / 1400 mm</b>

\* Data that may vary depending on the type of pellets used.

\*\*Heatable volume based on the requested power per m3 (respectively 55-35-20 W/m3)