

# KOOK 60 4.0


## Wood Insertion Cookers

# CADEL

Certificate model name : KOOK60 4.0 - KOOK60 4.0V



Nominal power	kW	6,2
Reduced power	kW	-
Introduced thermal power (max)	kW	7,4
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	84,1
Reduced efficiency	%	-
Heating volume (min-max)	m <sup>3</sup>	149
Nominal CO at 13% O <sub>2</sub>	%	0,097
Reduced CO at 13% O <sub>2</sub>	%	-
Emissions CO (13% O <sub>2</sub> ) (min-max)	mg/Nm <sup>3</sup>	1209
Emissions OGC (13% O <sub>2</sub> ) (min-max)	mg/Nm <sup>3</sup>	69
Emissions NOX (13% O <sub>2</sub> ) (min-max)	mg/Nm <sup>3</sup>	78
Dust content at 13% O <sub>2</sub> (min- max)	mg/Nm <sup>3</sup>	29,8
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	1,7
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	50
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	7,3
Exhaust fumes temperature (max)	°C	168
Net weight	kg	121,6
Gross weight	kg	135,8
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

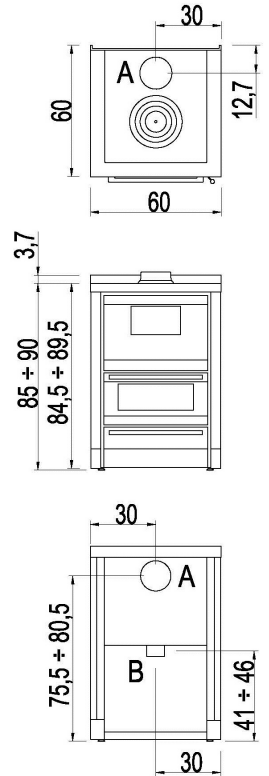

### MATCH

71180060	NEUTRAL STRUCTURE	EAN 8053859010548
71180061	NEUTRAL STRUCTURE with ventilation + light kit	EAN 8053859010555
6915036	Stainless steel	EAN 8033123616829
6915035	Anthracite steel	EAN 8033123616812
6915051	White steel	EAN 8033123617116
6915034	Black steel	EAN 8033123616805

### OPTIONAL

5018015	Top	EAN 8053859012863
5021005	Raccordo 140/150 mm	EAN 8053859014256

### PLUS



Cooking



Central Top and back exhaust



Refractory stone inner with 2nd combustion air



OPTIONAL Ventilation + light kit




View on the oven



Built - in


### STOVE PACKING



L (cm)	H (cm)	P (cm)
77	100,5	79


VOLUME (m <sup>3</sup> )
0,61

### LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	60	13,5	80

### STOCKING



### TRANSPORT

