

CRISTAL 7 UP




Certificate model name : CRISTAL3 7.0 UP

PELLET AIR - Pellet stoves




Nominal power	kW	7
Reduced power	kW	2,5
Introduced thermal power (max)	kW	7,7
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	η_s [%]	86
Nominal efficiency	%	90
Reduced efficiency	%	91
Heating volume (min-max)	m ³	71 - 200
Nominal CO at 13% O ₂	%	0,0034
Reduced CO at 13% O ₂	%	0,0190
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	238 - 42
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	4,0 - 1,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	140 - 117
Dust content at 13% O ₂ (min-max)	mg/Nm ³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	12
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,6 - 1,7
Autonomy (min-max)	h	7 - 20
Ignition electrical absorption (max)	W	345
Operating electrical absorption (max)	W	49
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Mass of smoke (min-max)	g/sec	2,6 - 4,6
Exhaust fumes temperature (max)	°C	176
Net weight	kg	56
Gross weight	kg	66
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

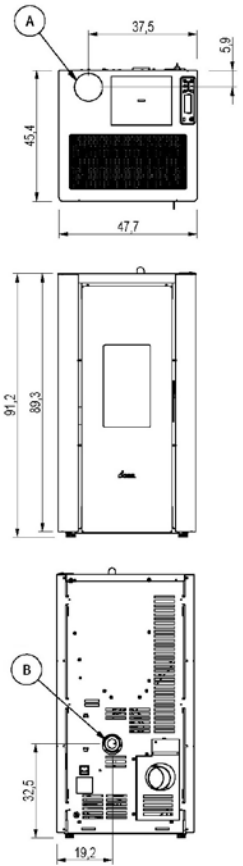


MATCH

7021026		Black steel	EAN 8053859013426
7021027		Titanium steel	EAN 8053859013433
7021028		Dark gold steel	EAN 8053859013440

PLUS

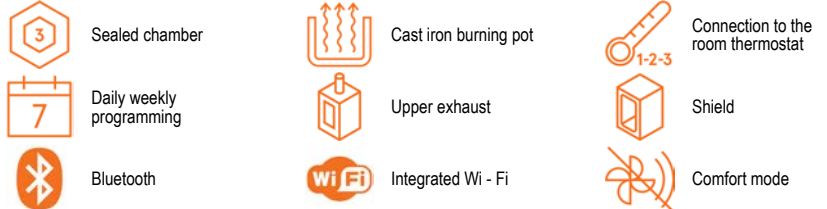


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	110.8	60


VOLUME (m ³)	0,53
--------------------------	------

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

