

ELLE PLUS 9




Certificate model name: ELLE PLUS 9 T2



PELLET AIR PLUS - Pellet stoves

Nominal power	kW	8,5
Reduced power	kW	3,3
Introduced thermal power (max)	kW	9,9
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	86
Nominal efficiency	%	89
Reduced efficiency	%	89
Heating volume (min-max)	m³	92 - 238
Nominal CO at 13% O ₂	%	0,010
Reduced CO at 13% O ₂	%	0,012
Emissions CO (13% O ₂) (min-max)	mg/Nm³	140 -125
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	3 - 7
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	133 - 100
Dust content at 13% O ₂ (min- max)	mg/Nm³	15 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,7 - 2,0
Autonomy (min-max)	h	21 - 8
Ignition electrical absorption (max)	W	300
Operating electrical absorption (max)	W	100
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Mass of smoke (min-max)	g/sec	3,5 - 4,8
Exhaust fumes temperature (max)	°C	238
Net weight	kg	126
Gross weight	kg	136
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

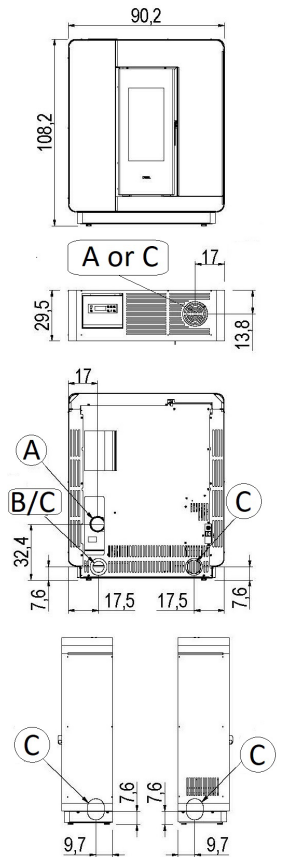

MATCH

7023043	Light bronze steel	EAN 8053859019336
7023044	Titanium steel	EAN 8053859019343
7023045	"nero greco" stone	EAN 8053859019350
7023046	"ossido bruno" stone	EAN 8053859019367
7023047	Black glass	EAN 8053859019374


OPTIONAL :

5023001	Upper + concentric exhaust kit	EAN 8053859019473
---------	--------------------------------	-------------------

PLUS

	Cast iron burning pot		Sealed chamber		Ducting with 1 independent motor
	Integrated Wi - Fi		Connection to the room thermostat		Comfort mode
	Back exhaust		Bluetooth		Cast iron inner
	Daily weekly programming		Concentric flue kit (optional)		Flexibility of installation
	Go fast - faster pellet ignition		Upper exhaust (optional)		5 stars


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	118,2	102,2


VOLUME (m³)
0,95

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

